



DATA DISPLAY GROUP

Datasheet

EETI

ETP-MB-MER4050UEBG

TO-02-093R1.1

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

ETP-MB-MER4050UEBG




禾瑞亞科技股份有限公司
eGalax_eMPIA Technology Inc.

5-Wire USB Touch Panel Controller

eGalax_eMPIA launched touch control board to meet latest Restriction of Hazardous Substances (RoHS) Directive. This touch panel controller provides the optimistic performance of your analog resistive touch panels for 5 wire models. It communicates with PC system directly through USB connector. You can see how superior the design is in sensitivity、accuracy and friendly operation. The touch panel driver emulates mouse left and right button function and supports operation systems as following.

OS	Version	Interfaces
Windows	Windows 7, Vista, XP, 2000, ME, 98 Windows CE (up to 7.0) Windows Embedded Windows XP Tablet PC edition	RS232/USB
Windows	Windows NT4, 95	RS232
Linux	Supports Kernel 2.4.x / 2.6.x / 3.x with XFree86 4.x / xorg (up to X server 1.11.x). Supports most of the Linux distribution 32/64 bit versions, Including: CentOS, Debian, Fedora, Gentoo, Mandrake(Mandriva), Moblin(Meego), Red Hat, Ubuntu, Slackware, SuSE(openSuSE) etc.	RS232/USB
	Android (up to 4.x)	RS232/USB
DOS	DOS 6.22	RS232
Mac	Mac OS9, Mac OS X (Power PC, Intel CPU)	USB
QNX	QNX RTOS v6.3	RS232/USB

Controller:

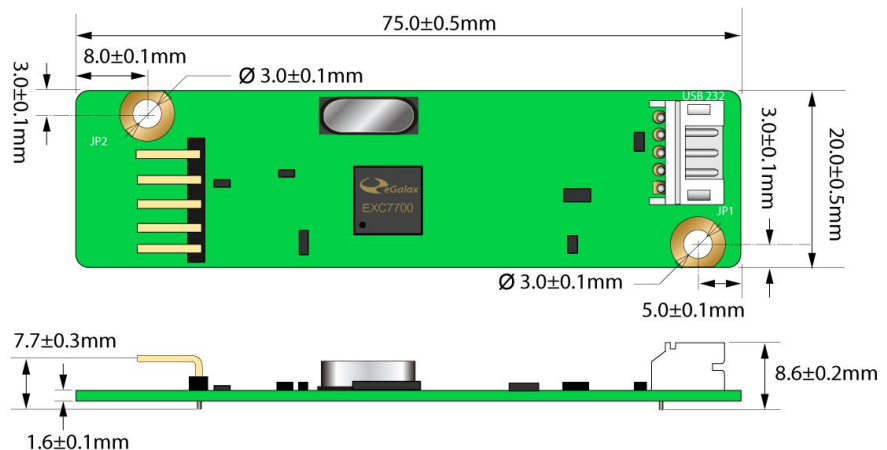

ETP-MB-MER4050UEBG

Specifications:

5wire Type Controller	
Circuit Board Dimension	20mm x 75mm (0.79inches x 2.95inches)
Power Requirements	D.C.+5V (100mA typical,50mV peak to peak maximum ripple and noise)
Operating Temperature	-25 to 85 °C
Storage Temperature	-25 to 85 °C
Relative Humidity	95% at 60 °C, RH Non-condensing
Interface	USB: 1.1 Full Speed
Resolution	2048×2048 resolution
Report rate	USB: Max. 200 points/sec
Response time	Max. 20 ms
Attached Cable	USB: 180cm shielded cable with USB-A connector
Regulatory Approvals	FCC-B , CE
EMI	Unaffected by environmental EMI
Panel resistance	5 wire resistive model: 50 ~ 200 ohm (Pin to pin on same layer, Touch Resistance under 3k ohm)
Green Product	RoHS Compliant
MTBF	200,000 hrs

ETP-MB-MER4050UEBG-02 full package:



- (1) ETP-MB-MER4050UEBG (5 wire control board)
- (2) ETP-CB-SXU00 (USB cable)
- (3) ETP-CB-5XN00 (5 pin Flat cable)

ETP-MB-MER4050UEBG

Controller Panel Pin Assignment:


For 5-Wire Resistive Touch Panel

ELO type Pin-Out

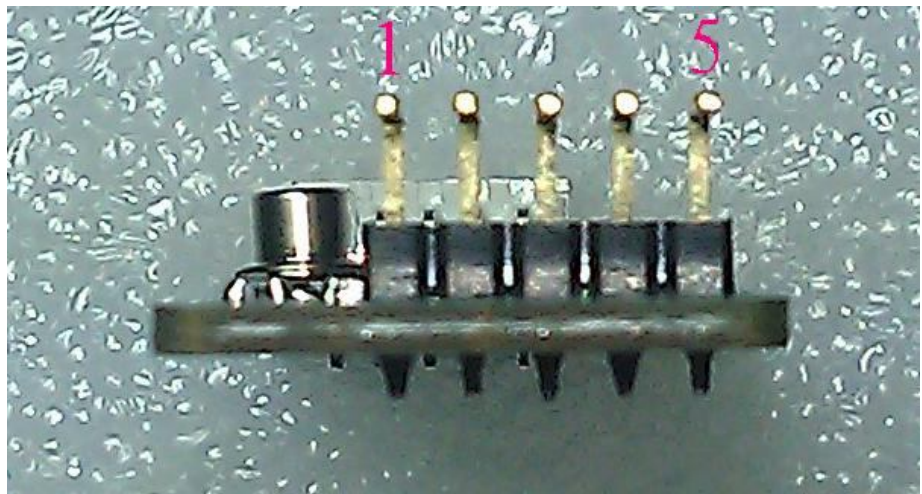


Controller Wafer Pin Assignment:

USB Interface

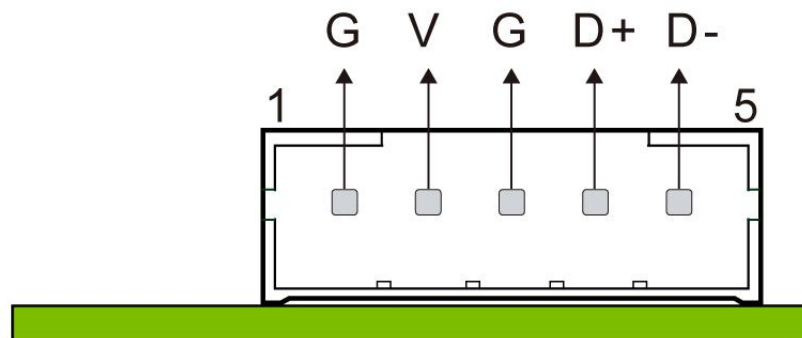

Our company network supports you worldwide with offices in Germany, Great Britain, Italy, Turkey and the USA. For more information please contact:



DATA DISPLAY GROUP

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom

Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@datadisplay-group.co.uk
Internet: www.datadisplay-group.co.uk

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1 Ronkonkoma, NY
11779
United States of America

Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@datadisplay-group.com
Internet: www.datadisplay-group.com

Sales Partner:

REM Italy s.a.s.

di Michieletto Flavio & C.
Via Obbia Bassa, 10
I-35010 Trebaseleghe (PD)
Italy
Phone: +39 335 521 37 89
E-Mail: info@remitaly.com
Internet: www.remitaly.com

Sales Partner:

DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ

Barbaros Mh Ak Zamabak Sk A Blok
D:143 Ataşehir/İstanbul
Turkey
Phone: +90 (0)216 / 688 04 68
Fax: +90 (0)216 / 688 04 69
E-Mail: info@data-display.com.tr
Internet: www.data-display.com.tr