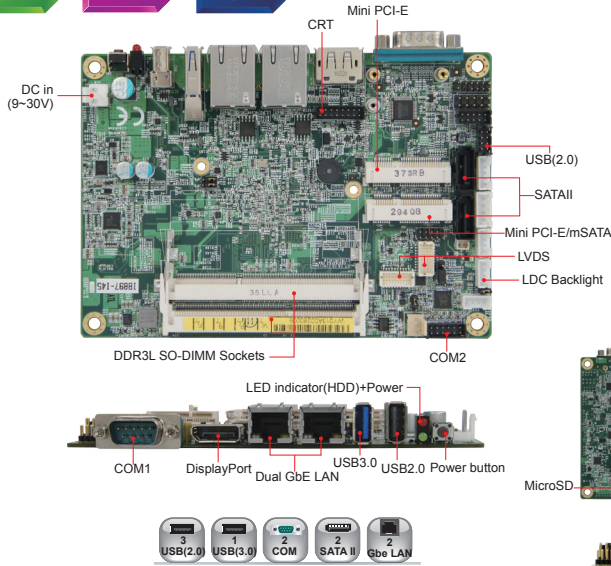

Datasheet

iBASE

IB897

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



Features

- Onboard Intel® Atom™ E3845/E3827/E3815 SoC, 1.91GHz/1.75GHz/1.46GHz
- 2x DDR3L-1333 SO-DIMM, Max. 8GB
- Supports VGA, DisplayPort and 24 bit dual channel LVDS
- 2x Intel® I210IT PCI-E Gigabit LAN
- Watchdog timer, Digital I/O, mSATA, iSMART
- 3x USB2.0, 1x USB3.0, 2x COM, 2x SATA II, 1x MicroSD slot
- 2x Mini PCI-E slots (1x full-size, 1x half size)
- Wide operating temperature support



System

CPU	Intel® Atom™ QC E3845 (1.91GHz, 2MB cache) Intel® Atom™ DC E3827 (1.75GHz, 1MB cache) 2nd Atom™ SC E3815 (1.46GHz, 512k cache)
System Memory	2x DDR3L-1333 SO-DIMM, Max 8GB (Non-ECC) 1x DDR3L-1333 SO-DIMM, (IB897-215 only)
System Chipset	Integrated in Intel® Atom™ SoC
BIOS	AMI
Watchdog Timer	256 levels
SSD	1x mSATA, 1x MicroSD
H/W Monitor	Yes
Expansion Slots	2x Mini PCI-E (1x full-size, 1x half-size)

Mechanical and Environmental

Dimensions	102mm x 147mm (4" x 5.8")
Max. Power Requirement	Intel® Atom™ E3845 @ 1.91GHz w/ 2x Transcend 2GB DDR3L-1600 +12V: 1.57A
Operating Temperature	-40°C~85°C (-40°F~185°F)
Storage Temperature	-40°C~90°C (-40°F~194°F)
Relative Humidity	90% (non-condensing @60°C)

Graphics

VGA Controller	Intel® Atom™ SoC integrated Gen7 4EUs graphics
VGA Memory	Shared memory
Display Interface	Supports CRT, DisplayPort, and 24-bit dual channel LVDS

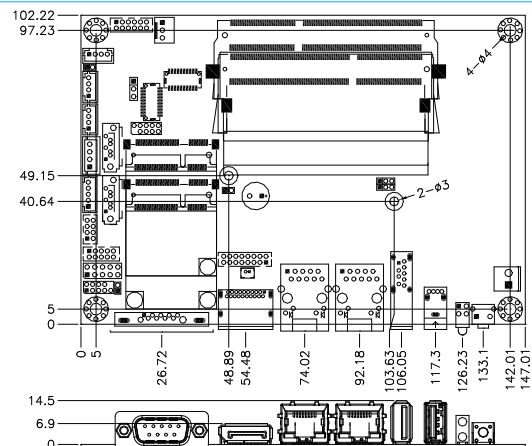
Ordering Information

IB897-I45	Intel® Atom™ E3845(1.91GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART
IB897-I27	Intel® Atom™ E3827(1.75GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART
IB897-I15	Intel® Atom™ E3815(1.46GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART
IB897-I45P	Intel® Atom™ E3845(1.91GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART, pin-header type for power button and LED
IB897-I27P	Intel® Atom™ E3827(1.75GHz) 3.5-inch Disk Size SBC w/ dual PCI-E GbE LAN, CRT, DisplayPort & LVDS, mSATA, iSMART, pin-header type for power button and LED
HSIB897-BGA	Heatsink for IB897
HSIB897-BGA-1	Heat Spreader for IB897
IB76	Cable Kit w/ USB, COM, power, SATA + power, VGA

LAN

Controller	2x Intel® I210IT PCI-E Gigabit LAN
Connector	2x RJ-45 on board

Dimensions and Drawing



Multi I/O

I/O Chipset	Nuvoton NCT5523D 1x RS232/422/485 (jumperless selection) 1x RS232, 2x SATA II
USB	1 port USB3.0 on board 1 port USB2.0 on board 2 ports USB2.0 via pin header
Audio	Intel® Atom™ SoC built-in HD Audio controller + Realtek ALC269Q HD codec w/ class-D amplifier
Others	Digital I/O, +9V~+30V DC-In, iSMART, Wide-range temperature

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 672755
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com