



DATA DISPLAY GROUP

---

# Datasheet

## Data Display Group

**TP-DD1040-B04**

**10.4" PCAP Touch Panel**

**COF, USB Interface**

TO-09-016R1.1

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

---

## 0、目录 Table of contents

0、目录 Table of contents.....	2
1、产品变更记录 Revision sheet.....	3
2、样品规格 Sample Specification.....	4
2.1 品名编号 Product name Code No.....	4
2.2 适用范围 Scope.....	4
2.3 功能 Function.....	4
2.4 结构 Construction.....	4
3、产品规格 General Specifications.....	5
3.1 产品尺寸 Size of product.....	5
3.2 电器特性 Electric characteristics.....	5
3.3 光学特性 Optical characteristics.....	6
3.4 机械特性 Mechanical characteristics.....	6
4、外观检验标准 Appearance limit standard.....	7
4.1 外观检验条件 Appearance limit conditions.....	7
4.2 产品的可视区 Touch panel view area.....	8
4.2.1 刮伤 Scratch.....	8
4.2.2 状杂物 Dot-like Foreign Matter.....	8
4.2.3 线状杂物 Linear Foreign Matter.....	9
4.2.4 透明胶气泡/变形 OCA bubbles and distortion.....	9
4.3 碎裂、破损 Chip And Crack.....	10
5、信赖性条件 Reliant condition.....	11
6、附件 Attachment.....	12
7.1 工程图 Engineering drawing.....	12
7、特殊事项及注意事项 Special & Notice Precaution.....	13
7.1 特殊事项及注意事项 Special & Notice Precaution.....	13

版本号 Revision No.	日期 Date	变更内容 Content		变更原因 Reason	签名 Sig.
		变更前 Before	变更后 After		
REV.1	2015.07.09	--	--	初版 First edition	
Remark/备注:					

## 2、样品规格 Sample Specification

### 2.1 品名编号 Product name Code No

电容性的透明轻触面板 Capacitive transparency touch panel

### 2.2 适用范围 Scope

这份说明书的目的就是为 multi-touch 功能的触摸感应模组提供常规规定和品质需求。这份文件和模组装配图纸是该产品的最高等级说明书，它包括产品介绍、支持文件和规格。

The purpose of this specification is to define the general provisions and quality requirements that apply to the supply of capacitive-type multi-touch function TOUCH SENSOR MODULE. This document and the Module Assembly Drawing are the highest-level specification for this product. It concludes description of product, supporting documents and related specifications.

### 2.3 功能 Function

消费者将电容式触摸感应模组用于类似 TFT-LCD 的平面显示器上，当使用者用手指触摸时，TOUCH SENSOR 电路就显示出与触摸位置对应的点。TOUCH SENSOR MODULE is a capacitive-type that customer uses on the flat panel display likes TFT-LCD. Once user touches it by FINGER, the circuitry of this TOUCH SENSOR indicates corresponding point at the contact area.

### 2.4 结构 Construction

结构 Construction	所用材料 Materials used	注释 Comment
面版 Graphic overlay	1.8mm Glass,	厚度:1.8mm Thickness : 1.8mm
双面胶 Adhesive	OCA1	厚度:0.125mm Thickness : 0.125mm
	OCA2	厚度:0.05mm Thickness : 0.05mm
SENSOR	ITO FILM	厚度:0.125mm Thickness : 0.125mm
	ITO FILM	厚度:0.125mm Thickness : 0.125mm

### 3、产品规格 General Specifications

#### 3.1 产品尺寸 Size of product

项目 Item	规格 Specifications (mm)	备注 Note
面板外形 Cover lens OD	225.50 (L) ×176.30 (W) ×1.8(T)	
可视区 View Area	211.44 (L) ×158.83 (W)	
驱动区 Active Area	212.44 (L) ×159.85 (W)	
功能片外形 Sensor OD	225.50 (L) ×176.30 (W) ×0.425 (T)	
总厚度 Total thickness	2.225±0.1	

#### 3.2 电器特性 Electric characteristics

项目 Item	规格 Specifications	备注 Note
操作电压 Operation Vortage	5V	
操作电流 Operation Current	正常模式 Nomal Operation Mode	
	睡眠模式 Sleep Mode	
触点数量 (Number of touchpoint)	10 Points	
IC 型号	GT9113+GTM802	

--	--	--

### 3.3 光学特性 Optical characteristics

项目 Items	规格 Specifications	备注 Note
透光率 Transparency	≥85%	
Glass Surface	glare	


### 3.4 机械特性 Mechanical characteristics

项目 Items	值 Value	备注 Note
表面硬度 Hardness	≥6H	

## 4、外观检验标准 Appearance limit standard

### 4.1 外观检验条件 Appearance limit conditions


项目 Items	规格 Specifications	
照度 Source of light	800-1500LUX	
与材料间的距离 Inspection Distance	25-30cm(见下图 see following drawing)	
检测时间 Inspection Time	≤10s/pcs	
检查环境 Inspection Environment	温度 Temperature : 22 ± 5°C	湿度 humidity : 50 ± 10%

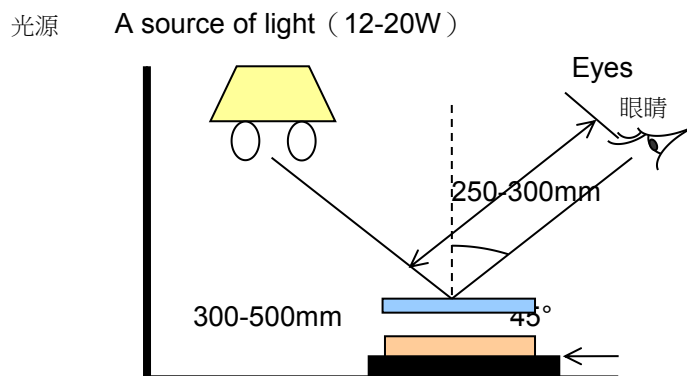

( Remark: D=diameter 直径 ; L=length 长度 ; W=width 宽 ; GT=glass thickness 玻璃总厚 )

4.2 产品的可视区 Touch panel view area

4.2.1 刮伤 Scratch

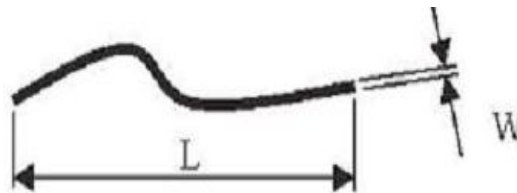

标准 CRITERIA	条件 conditions
宽 $\leq$ 0.05mm W $\leq$ 0.05mm	W $\leq$ 0.05mm, one object is ignored. 宽 $\leq$ 0.05mm, 允许一条
W $\leq$ 0.05 或 L $\leq$ 2mm 0.05mm $\leq$ 宽 $\leq$ 0.1mm 0.05mm $\leq$ W $\leq$ 0.1mm	L $\leq$ 2mm, W $\leq$ 0.05, one 不计. 长 $\leq$ 5mm, W $\leq$ 0.05, 允许一条; L $>$ 5mm the T/P is regarded as a defect. 长 $>$ 5mm 的 T/P 属不良品;
宽 $>$ 0.1mm W $>$ 0.1mm	The T/P is regarded as a defect. T/P 属不良品。

4.2.2 点状杂物 Dot-like Foreign Matter

标准 CRITERIA	条件 conditions
直径 $\leq$ 0.15mm D $\leq$ 0.15mm	不计
0.15mm $\leq$ 直径 $\leq$ 0.25mm 0.15mm $\leq$ D $\leq$ 0.25mm	粒状杂物与另一杂物之间的距离 $>$ 10mm, 允许有一个存在; One object is in distance from the other foreign object more Than 10mm. One object is allowed.
直径 $>$ 0.25mm D $>$ 0.25mm	T/P 属不良品。 The T/P is regarded as a defect.



4.2.3 线状杂物 Linear Foreign Matter

标准 CRITERIA	条件 conditions
宽 $\leq$ 0.05mm L $\leq$ 2mm	W $\leq$ 0.05mm, L $\leq$ 2mm 不计;
0.05mm $\leq$ 宽 $\leq$ 0.1mm 0.05mm $\leq$ W $\leq$ 0.1mm	长 $\leq$ 3mm, 与另一杂物之间的距离 $>$ 10mm, 可以忽略; 长 $\leq$ 3mm, 与另一杂物之间的距离 $<$ 10mm, 只允许有两个存在; L $\leq$ 3mm, One object is in distance from the other foreign object more than 10mm. It is ignored. L $\leq$ 3mm, One object is in distance from the other foreign object less than 10mm. Two objects are allowed.
宽 $>$ 0.1mm W $>$ 0.1mm	T/P 属不良品。 The T/P is regarded as a defect.

4.2.4 透明胶汽泡/变形 OCA bubbles and distortion

标准 CRITERIA	条件 conditions
V/A 区点状汽泡直径0.3mm 以下, 允许 3 个, OCA 轻微波浪纹变形不影响 FILM 变形可接受。 V/A Dot-like air-bubble, numbers $\leq$ 3, D $\leq$ 0.3mm are allowed, OCA Slight wave does not cause film distortion, It is accepted.	OCA 点状汽泡用检验规量测, OCA 轻微波浪纹变形需将产品平放于检验光源下 250~300mm 检验观察 FILM 有无变化。 OCA Dot-like air-bubbles are measured with gauge, OCA Slight wave need to check under lights of 250~300mm whether it causes the film distortion or not

## 4.3 碎裂、破损 Chip And Crack


**角断裂:**  $X < 2.0\text{mm}$  ,  $Y < 2.0\text{mm}$  和  $Z < \text{GT}$  , 可以忽略

- 1) 若角断裂位于金手指处, 严重影响产品的功能, T/P 属不良品;
- 2) 若角断裂位于线路上, 严重影响产品的功能, T/P 属不良品。

**Corner fragment:**  $X < 2.0\text{mm}$  and  $Y < 2.0\text{mm}$  and  $Z < \text{GT}$  it is ignored

4、Corner fragment in the golden finger that seriously affects the product function is regarded as a defect.

2) Corner fragment in the circuit that seriously affects product function is regarded as a defect.




**边断裂:**  $X < 5.0\text{mm}$  ,  $Y < 1.0\text{mm}$  和  $Z < \text{GT}$  , 可以忽略。

- 1) 若边断裂位于金手指处, 严重影响产品的功能, T/P 属不良品;
- 2) 若边断裂位于线路上, 严重影响产品的功能, T/P 属不良品。

**Side fragment:**  $X < 5.0\text{mm}$  and  $Y < 1.0\text{mm}$  and  $Z < \text{GT}$  it is ignored

1) Side fragment in the golden finger that seriously affects the product function is regarded as a defect.

2) Side fragment in the circuit that seriously affects product function is regarded as a defect.



## 5、信赖性条件 Reliant condition


编号 No.	项目 Item	测试环境 Test Condition	注释 Note
1	高温 High Temperature Operating	Ž, S°C	...
2	低温 Low Temperature Operating	-30°C	.....
3	高温高湿 High Temperature\ High Humidity	60°C, 90% RH, 120H	HyghYX UbX dUggYX ..
4	抗振动 Vibration resistance	The requirements in “Operation force” of the item 3-1 Mechanical Characteristics and 6 Electric characteristics shall be of 20 m/s <sup>2</sup> , 10 Hz to 55 Hz (1 min) is given for 30 min .each in the directions of X , Y , Z;	..
5	操作温度和湿度 Operating temperature and humidity	-' 0~70°C, ≤, 0% RH	
6	存储温度和湿度 Storage temperature and humidity	-30~80°C, ≤90% RH	
7	FPC 折弯测试 FPC bending test	total cycles:3cycles ,bending range: 0°->+90°->-90°->0°	pass
8	包材落下测试 Drop-test-with package	重 0-20kg, 落下高度: 30cm Packing weight, 0-20kg, drop height 30cm	pass
9	成品冲击测试 Drop-test-with Finished product	产品悬空, 60g 钢球, 40cm 高度自由落 下, 产品中间无裂痕。 The product is suspended, 110g balls, 30cm height of free falling, product of intermediate cracks	pass

--	--	--


## 6、工程图

### 6.1 工程图 Engineering drawing



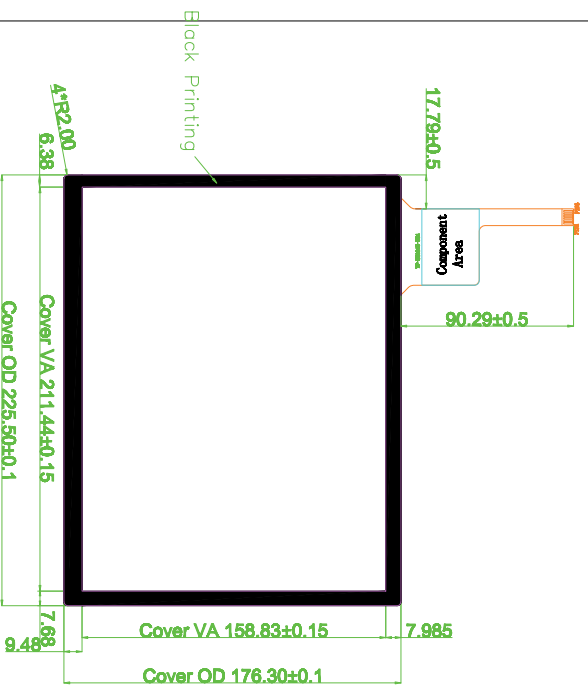

Front View

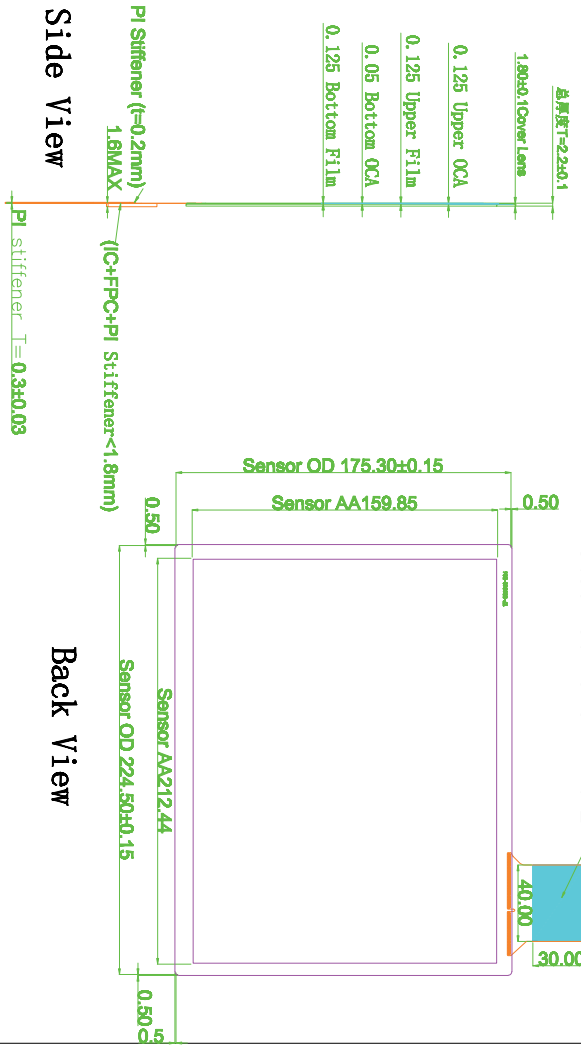


Side View

Back View

Specification:  
G++F++F

1. Working Voltage: 5 V
2. Transmittance: ≥85%
3. Hardness: 6H
4. Working environment: -30°C~+70°C, ≤80%RH
5. Storage environment: -30°C~+80°C, ≤90%RH
6. Without individual tolerance: ±0.2mm
7. Glass surface: glare



PIN	Assignment
PIN1	VCC5V
PIN2	D-
PIN3	D+
PIN4	GND
PIN5	NC
PIN6	NC

IC : GT9113+GTM802

Unit	mm		10.4" Projected Capacitive Touchscreen
Size	A4		
Scale	1:1	PRJ (3)	
Approved By			Part No.
Check By			TO-09-061R1.1
Design By	TJS	2015-8-6	Production Number
			TP-DD1040-B04



DATA DISPLAY GROUP

TO:

## 7、特殊事项及注意事项 Special & Notice Precaution

### 7.1 特殊事项及注意事项 Special & Notice Precaution

(1) 产品要避免折伤或弯曲。(特别是 30 度以上的弯曲会给屏体操作造成致命的影响。 Avoid product crease or blending ( Specially the product was blended over than 30° , it can deadly effect product' s operation.)

(2) 产品不可以叠放或在产品上放重物。 Do not overlap or stress the product.

(3) 要避免用尖锐物品扎伤产品或在产品上摆放重物。 Avoid aculated thing to prick product.

(4) 不可以直接用手触摸 Viewing Area ，防止在 Viewing Area 区域留下指纹与脏污，擦拭时应该使用柔软、干净的布。产品贴完保护膜放置一段时间，保护胶有可能粘在表面，这时可以用酒精清除。除乙醇外，不可用其它有机酸溶液或者碱性溶液擦拭产品。 Do not use figure to touch Viewing Area directly, Prevent fingerprint orstain attach on the Viewing Area, Clean the product using soft and neatness' s fabric. After the product was attached protect film for a period of time, the protect glue can leave in the surface, At this time it can use alcohol clean them. Do not use another organic acid solution or alkalescence solution clean the product , except ethanol .

(5) 不可以拉长或者弯曲 FPC, 组合时不向 FPC 施加多余的压力。 Do not elongate or blend the FPC, When assemble the product , Do not apply excessive forces to the flexible pattern.


(6) 产品的上下部 Edge 部相比左右部位容易产生特性不良, 要避免 VA 外观 lene 部位的按压行为。 Product' s top and bottom edge compared with the left and right edge can easy to cause characteristic defect, Avoid to stress the area of VA appearance lene.

(7) 除乙醇外，不可用其它有机酸溶液或者碱性溶液擦拭产品。 Do not use another organic acid solution or alkalescence solution clean the product , except ethanol .

(8) 为保护产品在包装运输工程或客户组装前刮伤污染产品，TP 产品正反面出货时均有贴合低粘性保护膜；由于受到外界温湿度环境影响，TP 产品放置一段时间后 TP 表面受低粘保护膜影响可能会出现白雾脏污现象，只需轻微擦拭即可，不作退货依据。

To protect products in packaging transportation engineering or before the customer assembly, the scrape contaminated the product. When the product outgoing , both side of TP affix low viscosity protective film. Due to the outside environment impact, After a period of time TP surface was effected by low viscosity protective film, It may appear white mist phenomenon, just slightly wipe the dirt, not return.

Our company network supports you worldwide with offices in Germany, Great Britain, the USA and Turkey.  
For more information please contact:



---

## DATA DISPLAY GROUP

### **Distec GmbH**

Augsburger Str. 2b  
82110 Germering  
Germany

Phone: +49 (0)89 / 89 43 63-0  
Fax: +49 (0)89 / 89 43 63-131  
E-Mail: [info@datadisplay-group.de](mailto:info@datadisplay-group.de)  
Internet: [www.datadisplay-group.de](http://www.datadisplay-group.de)

### **Display Technology Ltd.**

5 The Oaks Business Village  
Revenge Road, Lordswood  
Chatham, Kent, ME5 8LF  
United Kingdom

Phone: +44 (0)1634 / 67 27 55  
Fax: +44 (0)1634 / 67 27 54  
E-Mail: [info@datadisplay-group.co.uk](mailto:info@datadisplay-group.co.uk)  
Internet: [www.datadisplay-group.co.uk](http://www.datadisplay-group.co.uk)

### **Apollo Display Technologies, Corp.**

87 Raynor Avenue, Unit 1 Ronkonkoma,  
NY 11779  
United States of America

Phone: +1 631 / 580-43 60  
Fax: +1 631 / 580-43 70  
E-Mail: [info@datadisplay-group.com](mailto:info@datadisplay-group.com)  
Internet: [www.datadisplay-group.com](http://www.datadisplay-group.com)

### **Sales Partner:**

#### **DATA DISPLAY BİLİŞİM TEKNOLOJİLERİ İÇ VE DIŞ TİCARET LİMİTED ŞİRKETİ**

Barbaros Mh. Ak Zambak Sk. A Blok D:143  
34376 Ataşehir / İstanbul  
Turkey

Phone: +90 (0)216 / 688 04 68  
Fax: +90 (0)216 / 688 04 69  
E-Mail: [info@data-display.com.tr](mailto:info@data-display.com.tr)  
Internet: [www.data-display.com.tr](http://www.data-display.com.tr)