



Datasheet

Fujitsu Touch Controller

N16B-0558-B730


for 4-wire resistive touch panels

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

TOUCH PANEL CONTROL BOARD 4-WIRE USB

N16B-0558-B730 USB Interface Controller Board Quick Reference


4-Wire Resistive Touch Panels

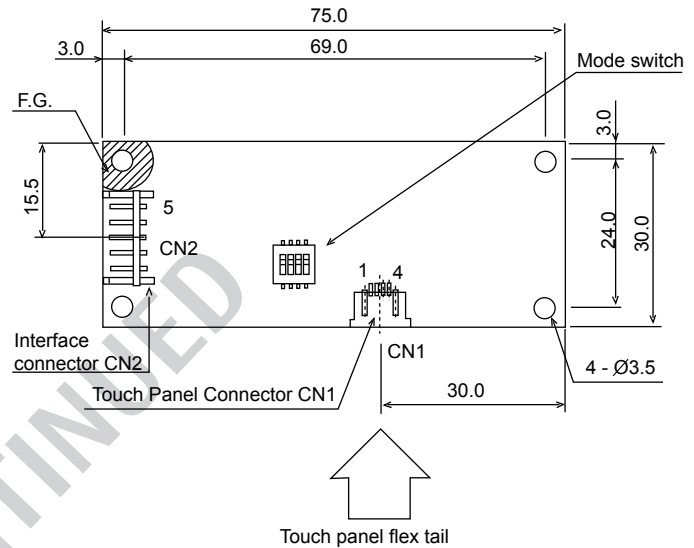

■ FEATURES

- High quality and reliability touch panel control board with integrated switch for selectable cable tail exit direction for FPC cable 4-wire touch panels.
- USB 1.1 bus powered interface for direct connection to PC or alternative USB interfaces.
- RoHS compliant

■ SWITCH SETTINGS

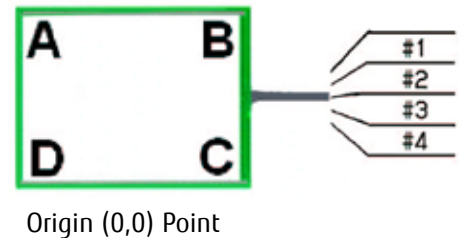

SW1	Orientation mode selection switches	OFF		ON		OFF		ON		<table border="1"> <thead> <tr> <th colspan="2">Connector Pin Assignment</th> </tr> </thead> <tbody> <tr> <td>#1</td> <td>Top</td> </tr> <tr> <td>#2</td> <td>Right</td> </tr> <tr> <td>#3</td> <td>Bottom</td> </tr> <tr> <td>#4</td> <td>Left</td> </tr> </tbody> </table>	Connector Pin Assignment		#1	Top	#2	Right	#3	Bottom	#4	Left
Connector Pin Assignment																				
#1		Top																		
#2	Right																			
#3	Bottom																			
#4	Left																			
SW2	ON	OFF	OFF	ON	ON	ON														
SW3	OFF	OFF	ON	ON	ON	ON														

Type A

SW1	Orientation mode selection switches	ON		OFF		ON		OFF		<table border="1"> <thead> <tr> <th colspan="2">Connector Pin Assignment</th> </tr> </thead> <tbody> <tr> <td>#1</td> <td>Left</td> </tr> <tr> <td>#2</td> <td>Top</td> </tr> <tr> <td>#3</td> <td>Right</td> </tr> <tr> <td>#4</td> <td>Bottom</td> </tr> </tbody> </table>	Connector Pin Assignment		#1	Left	#2	Top	#3	Right	#4	Bottom
Connector Pin Assignment																				
#1		Left																		
#2	Top																			
#3	Right																			
#4	Bottom																			
SW2	OFF	OFF	ON	ON	ON	ON														
SW3	OFF	ON	ON	ON	OF	ON														

Type B

Connector Pin Assignment listed on individual touch panel drawings.

USB 4 -Wire Control Board

■ CONSTRUCTION

Specification item		N16B-0558-B730 4-Wire USB Control Board
Mechanical	Size / Weight	75mm x 30mm / 30g
Electrical	Supply voltage (max./min.)	Vcc 5.5V/4.1V
	Operating current (detect)	36mA at Vcc=5V and T=25 degrees
	Sleep mode current	6mA at Vcc=5V and T=25 degrees
Environment	Operating temperature	-5°C to +60°C
	Storage temperature	-30°C to +70°C
	Humidity	20% RH to 85% at +38°C maximum wet bulb temperature

■ TOUCH PANEL CONNECTION CN1 (FCI: SFW4R-1STAE1-LF)

■ INTERFACE CONNECTION CN2 (JST #: S5B-EH (LF))

1.	+5V (Vcc)	3.	D-(S ignal)	5.	Frame G round
2.	D+ (S ignal)	4.	G round		

Complete specification document is available on request for customers with whom we have an approved NDA in place.

Fujitsu Components International Headquarter Offices

Japan Fujitsu Component Limited Gotanda-Chuo Building 3-5, Higashigotanda 2-chome, Shinagawa-ku Tokyo 141, Japan Tel: (81-3) 5449-7010 Fax: (81-3) 5449-2626 Email: promothq@ft.ed.fujitsu.com Web: www.fcl.fujitsu.com	Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/
North and South America Fujitsu Components America, Inc. 250 E. Caribbean Drive Sunnyvale, CA 94089 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components/	Asia Pacific Fujitsu Components Asia Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcalfcal.fujitsu.com Web: http://www.fujitsu.com/sg/services/micro/components/

©2011 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. June 9, 2011.

Our company network supports you worldwide with offices in Germany, Great Britain, Italy, Turkey and the USA. For more information please contact:



DATA DISPLAY GROUP

Distec GmbH

Augsburger Str. 2b
82110 Germering
Germany

Phone: +49 (0)89 / 89 43 63-0
Fax: +49 (0)89 / 89 43 63-131
E-Mail: info@datadisplay-group.de
Internet: www.datadisplay-group.de

Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF
United Kingdom

Phone: +44 (0)1634 / 67 27 55
Fax: +44 (0)1634 / 67 27 54
E-Mail: info@datadisplay-group.co.uk
Internet: www.datadisplay-group.co.uk

Data Display S.r.l.

Via Marco Polo, 9/D
I-35010 Trebaseleghe (PD)
Italy

Phone: +39 049 / 72 40 038
Fax: +39 049 / 72 40 039
E-Mail: info@datadisplay-group.it
Internet: www.datadisplay-group.it

Data Display Teknoloji Elektronik San Ve Diş Tic A.Ş.

Kustepe Leylak Sok.
Nursanlar Is Merkezi
Kat. 6 No: 21
Sisli / Istanbul
Turkey

Phone: +90 (0)212 / 356 04 20
Fax: +90 (0)212 / 356 04 25
E-Mail: info@datadisplay-group.com.tr
Internet: www.datadisplay-group.com.tr

Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1
Ronkonkoma, NY 11779
United States of America

Phone: +1 631 / 580-43 60
Fax: +1 631 / 580-43 70
E-Mail: info@datadisplay-group.com
Internet: www.datadisplay-group.com