
Datasheet

ADVANTECH

SOM-3567

QSeven CPU Module with Bay Trail


Intel® Atom™ E3845, E3827, E3825, E3815 / Celeron® J1900 Processor,

up to -40 ... +85°C (extended Temperature)

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.

SOM-3567

Intel® Atom™ E3800 & Celeron® Processor QSeven CPU Module



Windows Embedded

iManager WISE-PaaS/RMM



Features

- Intel® Atom® E3800 and Celeron® Processor Series
- Qseven® 2.1 Specification Compatible
- Onboard Dual Channel DDR3L-1333 up to 8GB, eMMC up to 32GB
- LVDS and HDMI/DP support H.264, MPEG2 HW Decode/Encode
- GbE, 3 PCIe x1, 1 USB3.0, 6 USB2.0
- iManager WISE-PaaS/RMM, and Embedded Software APIs

Software APIs:



Watchdog



PC



SMBus



H/W Monitor



GPIO




Brightness Control

Specifications

Compliance	Form-Factor	QSeven 70 x 70 mm				
	Pin-out Type	QSeven 2.1				
Platform	CPU	Atom® E3845	Atom® E3827	Atom® E3825	Atom® E3815	Celeron® J1900
	Base Frequency	1.91GHz	1.75GHz	1.33GHz	1.46GHz	2.00GHz
	Burst Frequency	-	-	-	-	2.42GHz
	Core/Thread	4/4	2/2	2/2	1/1	4/4
	LLC	2MB	1MB	1MB	512KB	2MB
	CPU TDP	10W	8W	6W	5W	10W
	Chipset	N/A				
	BIOS	AMI EFI BIOS				
Memory	Technology	DDR3L-1333	DDR3L-1333	DDR3L-1066	DDR3L-1066	DDR3L-1333
	ECC Support	Not support				
	Channel/Socket	Onboard Single/Dual Channels				
	Max. Capacity	Up to 8GB				
Graphics	Controller	Intel® Gen 7				
	Base/Turbo Freq.	542MHz	542MHz	533MHz	400 MHz	688 MHz
	Graphics Burst Frequency	792MHz	792MHz	-	-	854 MHz
	Graphics Memory	Up to 1720MB DVMT				
	3D/HW Acceleration	DX11, OGL3.2, OCL1.1, and H.264/AVC, VC-1, MPEG2 HW Decode/Encode				
Display	LCD	LVDS: Dual channel 18/24-bit, up to 1920 x 1080				
	DDI	1 DDI support HDMI/DVI/DP configurable				
		HDMI 1.4b: 3840 x 2160 @ 30Hz or 2560 x 1600 @ 60Hz, 24 bpp				
		DVI: up to 1920 x 1080 @ 60Hz DP 1.1a: 3840 x 2160 @ 30Hz or 2560 x 1600 @ 60Hz, 24 bpp				
Multiple Display	Dual display (LCD + DDI)					
Expansion	PCI Express	3 PCIe x1, optional 4 ports while remove Ethernet; Support x1, x2, x4 configurable				
	Audio Interface	HD Audio				
	LPC	Yes				
Serial Bus	SMBus	Yes				
	I ² C Bus	Yes				
Ethernet	Controller	Intel® i210IT				
	Speed	10/100/1000 Mbps				
Onboard Storage	eMMC	eMMC4.51 up to 32GB				
	SATA	2 Ports, Support Gen3.1 (6Gb/s) and Gen2 (3 Gb/s) or Gen 1(1.5 Gb/s)				
I/O	USB3.0	1 Port				
	USB2.0	6 ports				
	SPI Bus	Support SPI BIOS EEPROM				
	GPIO	Not support GPIO mux with LPC				
	Watchdog	Multi-stage Watchdog Timer Output, 65536 level, 0 ~ 65535 sec				
	COM Port	4-wire COM 2 Ports (1 on MFG pins), optional support GPIO				
	Smart Fan	1 port				
Power	Type	ATX: Vin, VSB, AT: Vin				
	Supply Voltage	Vin: 5V±5%, VSB: 5V±5%, RTC Battery: 2.0-3.3V				
	Power Consumption	TBD				
Environment	Temperature	0 ~ 60° C (32 ~ 140° F)				
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95%relative humidity, non-condensing				
	Vibration Resistance	3.5 Grms				
Mechanical	Dimensions	70 x 70 mm (2.75" x 2.75")				

Block Diagram

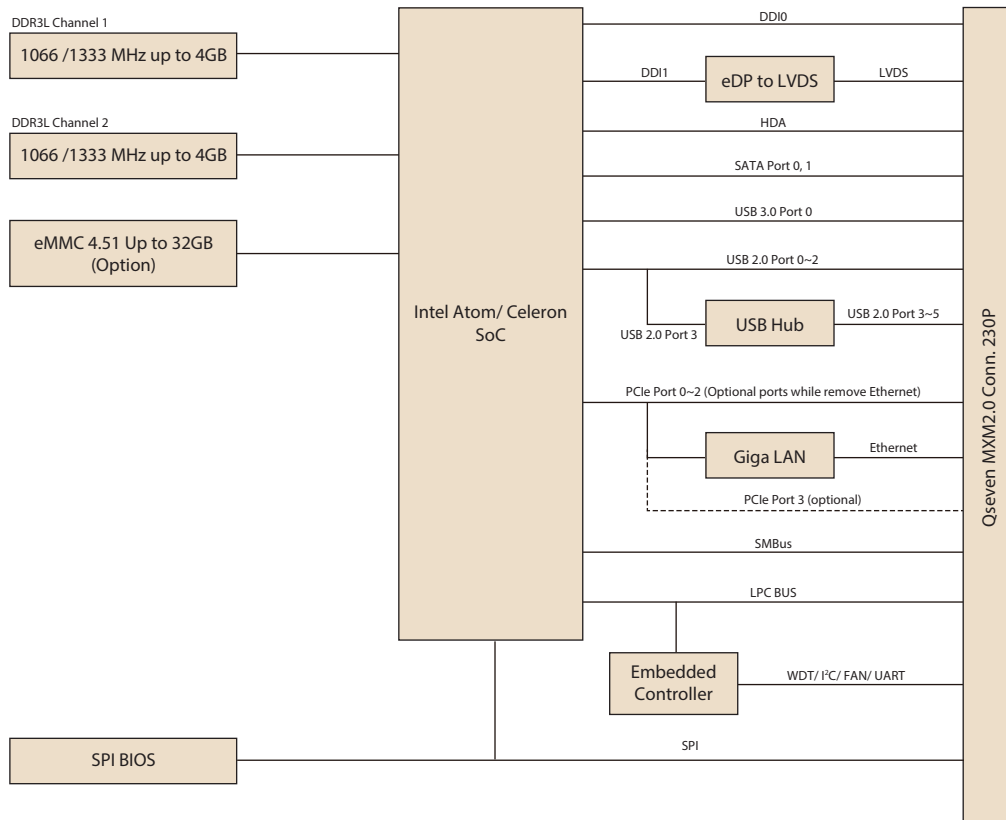

Ordering Information

Part No.	CPU	Freq.	Core	CPU TDP	Memory	eMMC	Thermal Solution	Operating Temperature
SOM-3567CS0C-S9A1E	Atom E3845	1.91GHz	4C	10W	4GB	NA	Passive	0 ~ 60° C
SOM-3567BS0C-S7A1E	Atom E3827	1.75GHz	2C	8W	2GB	NA	Passive	0 ~ 60° C
SOM-3567CS0C-U0A1E	Celeron J1900	2.0GHz	4C	10W	4GB	NA	Passive	0 ~ 60° C
SOM-3567CMBX-S9A1E	Atom E3845	1.91GHz	4C	10W	4GB	32GB	Passive	-40 ~ 85° C
SOM-3567BS0X-S7A1E	Atom E3827	1.75GHz	2C	8W	2GB	NA	Passive	-40 ~ 85° C
SOM-3567BS0X-S5A1E	Atom E3815	1.46GHz	1C	5W	2GB	NA	Passive	-40 ~ 85° C

Packing List

Part No.	Description	Quantity
-	SOM-3567 Qseven CPU Module	1
1960076583N000	Heatspreader	1

Optional Accessories

Part No.	Description
1960058145N001	Semi-Heatsink, 70L x 63W x 13.2H (0 ~ 60° C)
1960061089N001	Semi-Heatsink, 70L x 63W x 34H (-40 ~ 85° C)

Development Board

Part No.	Description	Quantity
SOM-DB3520-00A1E	Qseven Development Board	1

Embedded OS

OS	Part No.	Description
WES7	2070014541	img WES7E SOM-3567 X64 V5.7.0 Eng

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG

Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



FORTEC Elektronik AG

Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 672755
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com